


MGY

Magnetically operated zero air loss drain

Dimensions

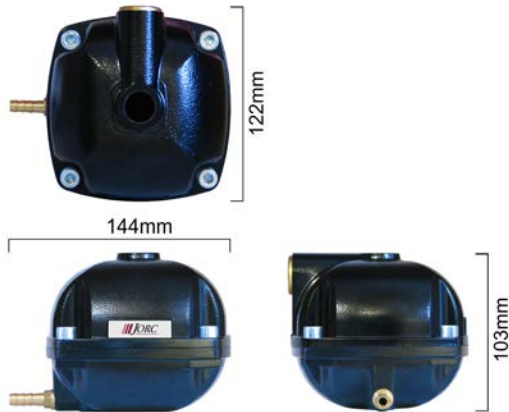

Technical Data

Max. filter capacity	Unlimited
Max. drainage capacity	145 litres condensate per hour at 16 bar
Min./max. system pressure	0 - 16 bar (up to 230 PSI)
Min./max. medium temperature	1 - 50 °C
Min./max. ambient temperature	1 - 50 °C
Environmental Protection Inlet connection	IP68 (NEMA 6) 1/2" BSP or NPT, 2 inlet options
Inlet height	10,3 cm (top) 9 cm (side)
Outlet connection	1/8" BSP
Valve type	2/2 way direct acting
Valve orifice	2 mm
Valve seal	FPM
Serviceable valve	Yes
Housing material	Corrosion resistant aluminium, EP coating



Service kit available



Anti-air-lock adapter
(option)



Designed with top and
side inlet options