

BREATHING AIR SYSTEM BR-AIR PLUS

DESCRIPTION

BR-AIR PLUS system has been specifically designed for applications where high quality breathing air and monitoring of breathing air supply are needed. BR-AIR PLUS is a combination of our BR-AIR 0106 breathing air filter set combined with gas concentration analysers, fitted with pressure regulator and quick couplings, all packed in a compact and robust casing.

Gas concentration analysers constantly monitor CO, CO₂ and O₂ concentrations and trigger an alarm if concentrations exceed the EN12021 and BS4275:1997 standard compliant values. In this way BR-AIR PLUS can safely provide high quality breathing air for up to 5 people⁽¹⁾.

Small dimensions and low weight enable the use of BR-AIR PLUS in many applications as it can be transported and set up with ease.



FEATURES

BR-AIR PLUS has the following features:

- High quality breathing air for up to 5 people⁽¹⁾;
- Air quality monitoring (EN 12021, BS 4275:1997)⁽²⁾;
- Compact;
- Light weight;

(1) Inlet air supply 7 bar, 20°C at peak inhalation rate 8,9 cfm (very high peak inhalation rate by BS 4275:1997)

(2) Monitoring concentrations of CO, CO₂ and O₂ for compliance with EN 12021 and BS 4275:1997

TECHNICAL SPECIFICATION

Electrical connection	230 VAC / 110 VAC / 9 VDC to 24 VDC
Power consumption	< 10W
Operating pressure range	0 - 16 bar (0 - 232 psi)
Operating temperature range	1,5 – 40°C (35 – 104°F)
Connection (Inlet, Outlet)	Quick coupling DN 7,2 (inlet-male , outlet-female)
Flow rate (7bar, 20°C)	120 Nm ³ /h (71 scfm)
Outlet quality class – solids (ISO 8573-1)	1
Outlet quality class – oils (ISO 8573-1)	1
Filtration stage S	solid and liquid particle filtration down to 0,01 µm
Filtration stage H ²	CO removal
Filtration stage A ²	oil particle filtration down to < 0,005 mg/m ³
Sensor warm up time	120 s
Response time	90 s
CO monitoring	warning 3 ppm, alarm 5ppm
CO ₂ monitoring	alarms (increasing intensity) at 500 ppm/1500 ppm
O ₂ monitoring	alarm at O ₂ concentration <19,5%
Analyser approvals	EN 50270:1999 EN 61000-6-3:2001+A11:2004 BS EN 61010-1:2001 IEC 61010-1(2ed) AS 61610.1-2003 (Australia & New Zealand)
Protection class of analysers	IP65
Weight	12 kg

PRESSURE EQUIPMENT DIRECTIVE PED 97/23/CE (Fluid group 2)

BR-AIR PLUS is constructed according to PED 97/23/CE but certification for this product is not required.

MAINTENANCE



Replace filter element S at least once per year or when pressure drop reaches 350 mbar.

Replace filter elements A² and H² at least every 3 months or sooner if it is required for a specific application.


Replace CO sensor element every 24 months. Calibrate CO sensor after replacing CO sensor element.

Replace O₂ sensor element every 12 months.

CO₂ sensor element does not need to be replaced.

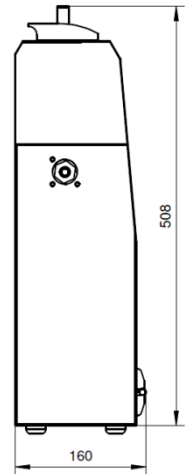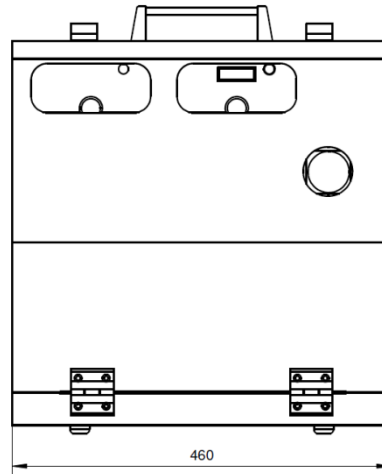

INFORMATION IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE

	<p>Our quality management system is certified by BUREAU VERITAS in conformity with ISO 9001:2008 Reg. number: 200285</p>	
---	--	--