

WELDED STAINLESS STEEL FILTER HOUSING – WFIFFC (EN/ANSI)

(flanged connection)

DESCRIPTION

WFIFFC welded stainless steel filter housings with flange connections have been specifically developed for filtration of compressed air as well as many other gasses ⁽¹⁾ where the risk for corrosion is very high or where stainless steel housing is required. To meet the required gas quality appropriate filter element must be installed into filter housing.



APPLICATIONS ⁽²⁾

- Biotechnology
- Breweries
- Chemical industry
- Petrochemical industry
- Diaries
- Fermentation processes
- Pharmaceutical industry
- Hospitals

⁽¹⁾ For list of suitable gasses please contact us or your local dealer.

⁽²⁾ WFIFFC process filter housing can be used in variety of applications. For applications not listed please contact us or your local dealer.

TECHNICAL SPECIFICATION

Operating temperature ⁽³⁾	-20 / + 150 °C	-4 / + 302 °F
Operating pressure	0 – 14 bar(g)	0 – 203 psi

⁽³⁾ Actual operating temperature depends on sealing material and type of filter element.

MATERIALS

Housing material	Stainless steel (quality 1.4404; on request 1.4301)
Sealing	FKM (Optional EPDM or SILICONE) / Aramid fibre with a nitrile rubber binder ⁽⁴⁾
Lubricant	(Optional Shell Cassida Grease RLS 2)

⁽⁴⁾ Flange connection sealing.

MAINTENANCE

Replace filter element at least every 12 months or follow the instructions for specific filter element. Once per year make a visual check of filter housing and make sure there is no visual damage.



SIZES

FILTER HOUSING	PIPE CONNECTION	FILTER ELEMENT	OPERATING PRESSURE	FLOW CAPACITY		DIMENSIONS [mm]					VOLUME [l]	WEIGHT [kg]
				[Nm ³ /h]	[scfm]	A	B	B ⁽⁵⁾	C	E		
WFIFFC 010	DN15	0420	14	150	88	230	195	217	76,1	1/2"	0,84	3,5
WFIFFC 01E	DN20	0520	14	225	132	263	201	219	76,1	1/2"	0,93	4,3
WFIFFC 030	DN25	0525	14	315	185	279	216	244	88,9	1/2"	1,4	5,7
WFIFFC 047	DN32	0725	14	420	247	348	239	267	88,9	1/2"	1,74	6,6
WFIFFC 070	DN40	0730	14	600	353	391	260	290	114,3	1/2"	3,4	8,0
WFIFFC 094	DN50	1030	14	900	530	444	270	304	114,3	1/2"	4,1	9,8
WFIFFC 150	DN50	1530	14	1260	742	571	270	304	114,3	1/2"	5,3	11,0
WFIFFC 17E	DN65	2030	14	1680	989	752	295	340	139,7	1/2"	10,2	14,2
WFIFFC 200	DN80	3030	14	2400	1.413	978	306	340	139,7	1/2"	14	21,2
WFIFFC 24C	DN80	3050	14	3600	2.119	1041	332	368	168,3	1/2"	21	22,9
WFIFFC 450	DN100	3x 2030	10	5040	2.966	981	410	/	219,1	1"	36	55
WFIFFC 60C	DN100	3x 3030	10	6720	3.955	1288	410	456	219,1	1"	43	64
WFIFFC 900	DN150	4x 3030	10	9600	5.650	1310	480	/	273,0	1"	77	87
WFIFFC 120i	DN150	6x 3030	10	13440	7.910	1351	540	598	323,9	1"	104	110
WFIFFC 1800	DN200	8x 3030	10	17280	10.171	1496	660	/	406,4	1"	180	200
WFIFFC 200i	DN200	10x 3030	10	21120	12.431	1496	660	/	406,4	1"	180	200

Flow capacity at 7 bar(g), 20°C

Standard is BSP pipe connection, other pipe connection on request.

B = flange connection EN 1092-1/11 PN16


B⁽⁵⁾ = flange connection ANSI B16.5 WN Cl 150

PRESSURE EQUIPMENT DIRECTIVE PED 2014/68/EU (Fluid group 2)

WFIFFC 010 - 070	Article 4.3
WFIFFC 094 - 200	Category 1, Module H
WFIFFC 240 - 600	Category 2, Module H
WFIFFC 900- 2000	Category 3, Module H

PRESSURE EQUIPMENT DIRECTIVE PED 2014/68/EU (Fluid group 1) ⁽⁶⁾

WFIFFC 010 - 047	Article 4.3
WFIFFC 070	Category 1, Module H
WFIFFC 094 - 200	Category 2, Module H
WFIFFC 240- 900	Category 3, Module H
WFIFFC 1200- 2000	Category 4, Module H1

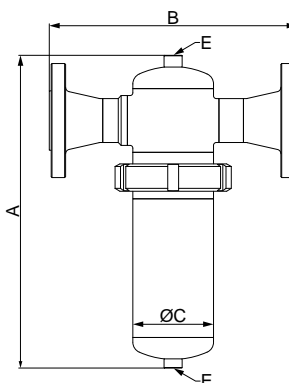

⁽⁶⁾ Fluid group must be specified in the order, if not standard fluid group 2 is selected.

CORRECTION FACTORS


To calculate the correct capacity of a given filter based on actual operating conditions, multiply the nominal flow capacity by the appropriate correction factor(s).

CORRECTED CAPACITY = NOMINAL FLOW CAPACITY x C_{OP}

OPERATING PRESSURE

[bar]	2	3	4	5	6	7	8	9	10	11	12	13	14
[psi]	29	44	58	72	87	100	115	130	145	160	174	189	203
C _{OP}	0,38	0,5	0,63	0,75	0,88	1	1,13	1,25	1,38	1,50	1,63	1,75	1,88

INFORMATION IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE

	Our quality management system is certified by BUREAU VERITAS in conformity with ISO 9001:2015 Reg. number: 200285
---	--



FLOTECH
Compressor & Vacuum Parts Ltd