

# FILTER HOUSING AAFsFCs - silicone free

## DESCRIPTION

AAFsFC filter housings have been specifically developed for high efficient removal of solid particles, water, oil aerosols, hydrocarbons, odour and vapours from compressed air <sup>(1)</sup> systems. In addition the filter housing was designed for easy installation. To meet the required compressed air quality appropriate filter element must be installed into filter housing.



## APPLICATIONS <sup>(2)</sup>

- Automotive
- Food & Beverage
- Chemical
- Paint

<sup>(1)</sup> For any other technical gas please contact us or your local dealer

<sup>(2)</sup> AAFsFC filter housing can be used in variety of applications. For applications not listed please contact us or your local dealer.

## TECHNICAL SPECIFICATION

Operating temperature	1,5 - 65 °C	35 - 149 °F
Operating pressure	0 - 16 bar(g)	0 - 232 psi

## MATERIALS

Housing material	Aluminium
Fittings, Screws	Brass, Brass-zinc plated, Steel
Cover	PA6
Sealing	NBR (silicone free)
Corrosion protection	Electrophoretic Coating (KTL)
Outside protection	Powder paint coated (Epoxy-polyester base)
Lubricant	/

**SIZES**

FILTER HOUSING	PIPE SIZE [inch]	FILTER ELEMENT	FLOW CAPACITY		DIMENSIONS [mm]				VOLUME [l]	WEIGHT [kg]
			[Nm <sup>3</sup> /h]	[scfm]	A	B	C	D		
AAFsFC 0006	1/8	03528	10	6	105	55	14	50	0,07	0,23
AAFsFC 0016	1/4	05528	18	11	125	55	14	70	0,09	0,24
AAFsFC 0026	1/4	03844	25	15	145	73	18	50	0,22	0,42
AAFsFC 0036	3/8	03844	30	18	145	73	18	50	0,22	0,42
AAFsFC 0046	1/4	06050	35	22	189	88	32	60	0,44	0,72
AAFsFC 0056	3/8	06050	60	35	189	88	32	60	0,45	0,71
AAFsFC 0076	1/2	07050	78	46	189	88	32	80	0,45	0,70
AAFsFC 0106	3/4	14050	120	70	257	88	32	150	0,64	0,78
AAFsFC 0186	1	12075	198	116	261	125	37	160	1,4	1,9
AAFsFC 0306	1	22075	335	197	361	125	37	250	2,0	2,4
AAFsFC 0476	1 1/2	32075	510	300	461	125	37	350	2,6	2,6
AAFsFC 0706	1 1/2	50075	780	459	641	125	37	530	3,6	3,5

Flow capacity at 7 bar(g), 20°C

Standard is BSP pipe connection, other pipe connection on request.

**PRESSURE EQUIPMENT DIRECTIVE PED 2014/68/EU (Fluid group 2)**

AAFsFC 0006 - AAFsFC 0476	Article 4.3
AAFsFC 0706	Category 1, Module H

**PRESSURE EQUIPMENT DIRECTIVE PED 2014/68/EU (Fluid group 1)<sup>(3)</sup>**

AAFsFC 0006 - AAFsFC 0026	Article 4.3
AAFsFC 0306 - AAFsFC 0476	Category 1, Module H
AAFsFC 0706	Category 2, Module H

<sup>(3)</sup> Fluid group must be specified in the order, if not standard fluid group 2 is selected.


**CORRECTION FACTORS**

To calculate the correct capacity of a given filter based on actual operating conditions, multiply the nominal flow capacity by the appropriate correction factor(s).

CORRECTED CAPACITY = NOMINAL FLOW CAPACITY x C<sub>OP</sub>

**OPERATING PRESSURE**


[bar]	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
[psi]	29	44	58	72	87	100	115	130	145	160	174	189	203	218	232
C <sub>OP</sub>	0,38	0,5	0,63	0,75	0,88	1	1,13	1,25	1,38	1,50	1,63	1,75	1,88	2,00	2,13

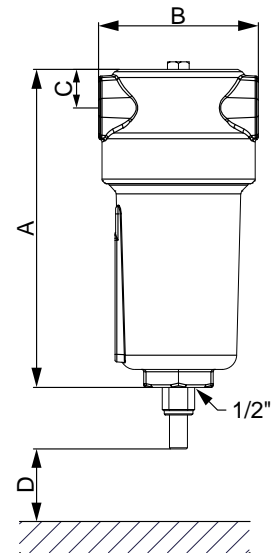

**MAINTENANCE**

Replace filter element at least every 12 months or follow the instructions for specific filter element. Once per year make a visual check of filter housing and make sure there is no visual damage.

INFORMATION IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE

	Our quality management system is certified by BUREAU VERITAS in conformity with ISO 9001:2015 Reg. number: SL22594Q
---	--